


- A. TREE
- B. TREEGUARD, ARBORGUARD
WWW.BENMEADOWS.COM
- C. DEPTH OF BARK MULCH—SEE PLAN
- D. GRASS
- E. FINISH SOIL GRADE
- F. BACKFILL WITH EXISTING NATIVE SOIL
- G. UNDISTURBED SOIL
- H. TIES TO STAKES TO HAVE RUBBER HOSE TO PROTECT TREE TRUNK FROM DAMAGE BY WIRE. WIRE TIES TO BE LOOSE (1" TO 2" PLAY ON PLAN) TO PROTECT TREE TRUNK FROM DAMAGE. WIRE TIES TO BE SET ON SAME TRUNK OR MAIN TRUNK.

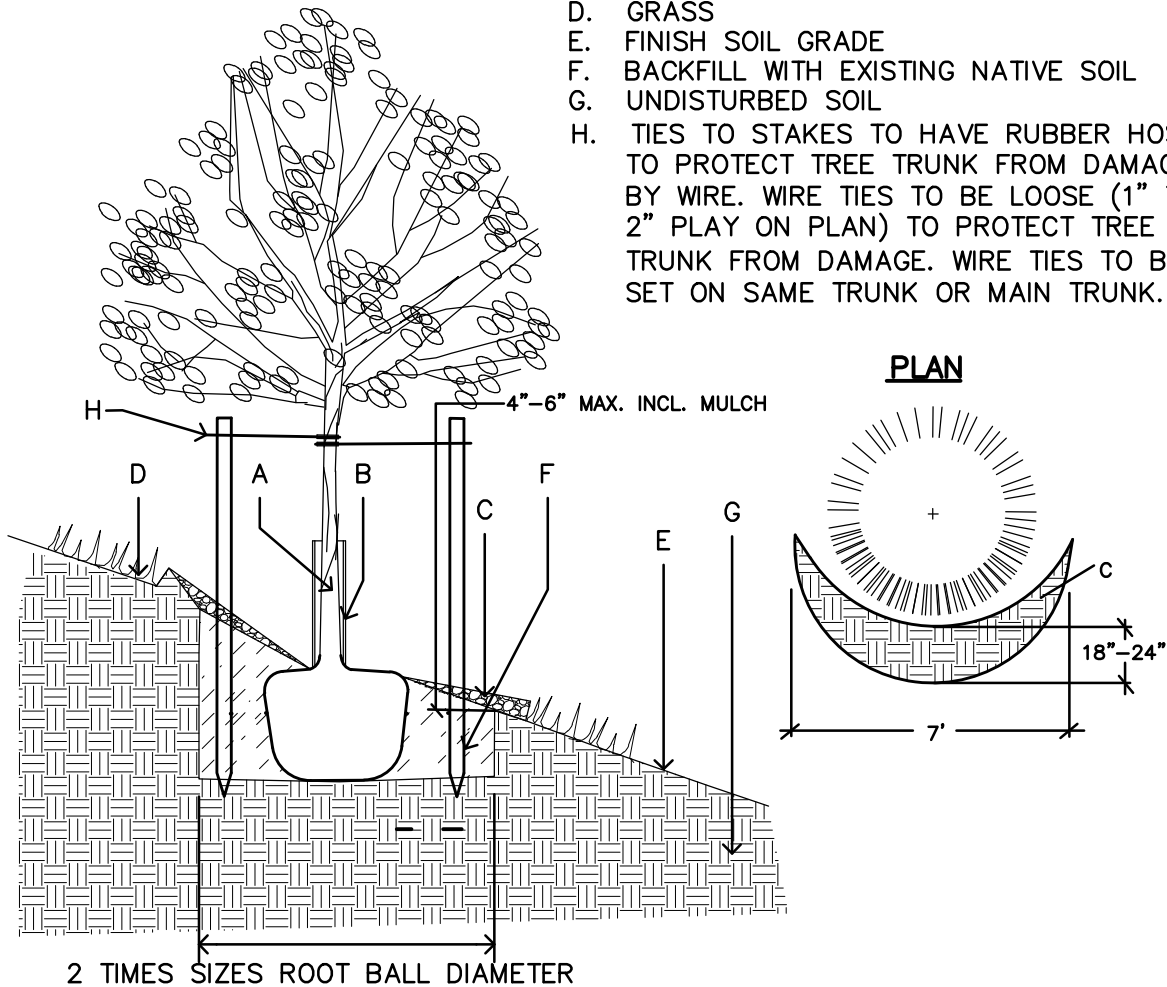

PLANTING ON SLOPE IN SODDED AREAS

NTS

GENERAL NOTES:

1. TREES PLANTED IN ROCKY, CALICHE AND CLAY SOILS TO HAVE PIT EXCAVATED 5 TIMES THE SIZE OF THE ROOTBALL.
2. TREES PLANTED IN ROCKY, CALICHE AND CLAY SOILS TO HAVE 1/3 TO 1/2 TOP SOIL BLENDED WITH CLAY SOIL AND USED AS BACKFILL.
3. TREES PLANTED IN ROCKY SOIL ARE TO HAVE ALL ROCKY MATERIAL LARGER THAN 1" IN SIZE REMOVED.

DETAIL NO.

600



CITY OF EL PASO
PARKS & RECREATION

DETAIL NAME

PLANTING ON SLOPE
IN SODDED AREAS

NTS